

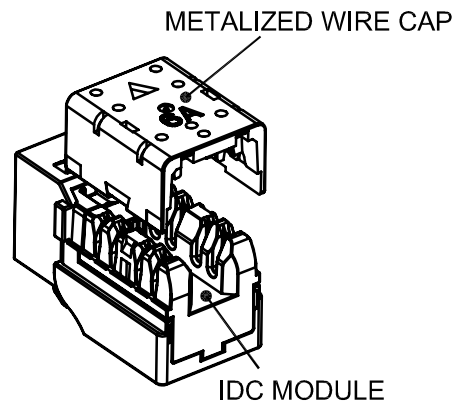
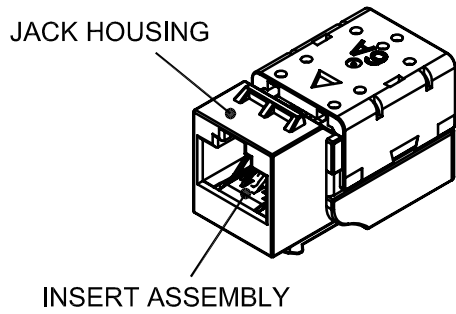


CAT.6A UTP QUICK JACK
AR-3998

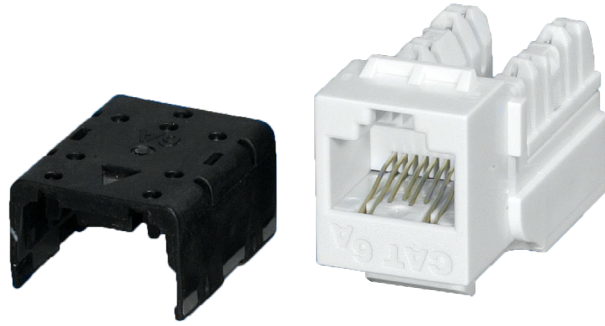

ASSEMBLY DIMENSION

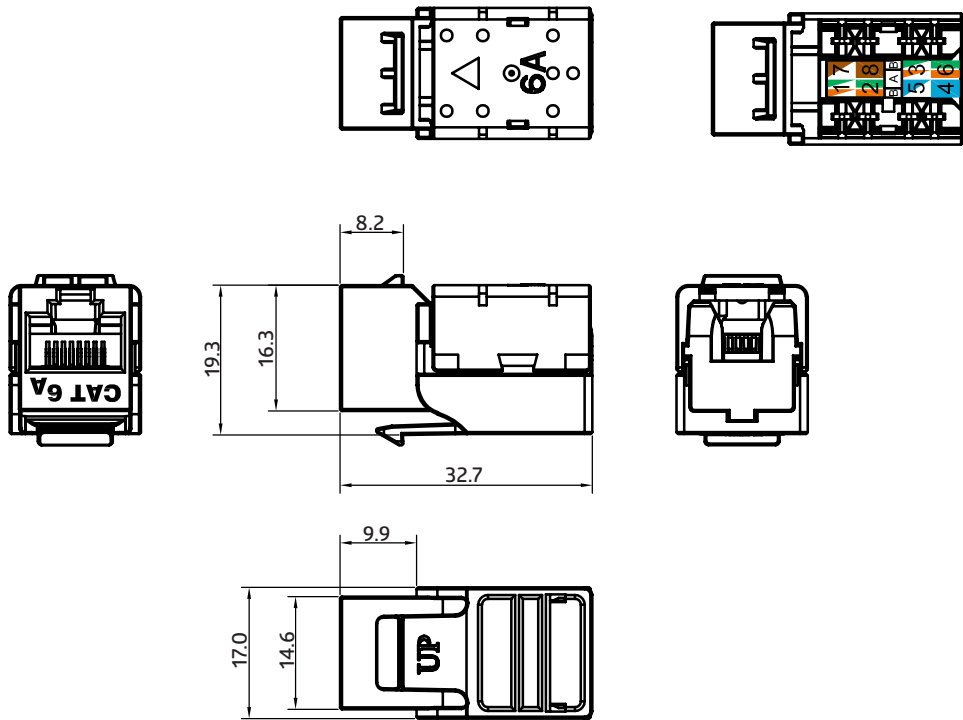

TRANSMISSION PERFORMANCE

Meet all requirements specified in connecting hardware requirement of:
 ISO/IEC 11801, Category 6A
 IEC 60603-7-41
 ANSI/TIA-568-C.2, Category 6A

ELECTRICAL

Electrical Insulation Resistance: 500 Ω
 min. @ 100V d.c
 Dielectric Withstanding Voltage: 1000V d.c. or a.c.
 Peak Contact to Contact @60Hz for 1 minute

MECHANICAL

Insertion / Extraction Life: 750 cycles minimum
 IDC Wire Gauge: 22 ~ 24 AWG

PHYSICAL

Housing: High-impact, Flame-retardant Plastic, UL 94C-O
 Spring wire: Phosphor Bronze Alloy plated with 50 micron-inch of Gold
 IDC: Phosphor Bronze Alloy with 100 micro-inch 100% Sn Alloy

COMPONENTS

ITEM	PART NAME	Q'TY
1	JACK HOUSING	1
2	INSERT MODULE	1
3	IDC MODULE	1
4	METALIZED WIRE CAP	1

Unless Otherwise Specified		
INCH	MM	ANGULAR
.X \pm .016	.X \pm .02	.X \pm 1°
.XX \pm .008	.XX \pm .01	.X \pm .5°
.XXX \pm .004		
Material		
Surface		
Finish		