



CENTRAL TUBE METALLIC ARMOR CABLE

AR-1UDPPE-xxF-G652D

1. GENERAL

1.1. SCOPE

This Specification covers the design requirements and performance standard for the supply of optical fibre cable in the industry. ARTIC ensures a stable quality control system for our cable products through several programs including ISO 9001, ISO 14001 and ROHS.

Cable type	Application
AR-1UDPPE-xxF-G652D	Duct installation, direct buried and aerial installation together with tension. strand wire.

xx represents the fibre counts of the cable.

1.2. REFERENCE

The cable offered by ARTIC are designed, manufactured and tested according to the standards as follows:

ITU-T G.652D	Characteristics of a single-mode optical fibre
IEC 60794-1-1	Optical fibre cables-part 1-1: Generic specification-General
IEC 60794-1-2	Optical fibre cables-part 1-2: Generic specification-Basic optical cable test procedure
IEC 60794-3	Optical fibre cables-part 3: Sectional specification-Outdoor cables
IEC 60794-4-10	Optical fibre cables-part 3-10: Outdoor cables-Family specification for duct and direct buried optical communication cables
IEC 60794-4-11	Optical fibre cables-Part 3-11: Outdoor cables-Detailed specification for duct and directly buried single-mode optical fibre telecommunication cables

1.3. LIFE TIME

Optical fibre cables supplied in compliance with this specifications is capable to withstand the typical service condition for a period of twenty-five (25) years without detriment to the operation characteristics of the cable.

1.4. APPLICATION

Item	Value
Installation temperature	-40 °C~+70 °C
Operation temperature	-40 °C~+70 °C
Storage temperature	-40 °C~+70 °C
Static bending radius	10 times the cable diameter
Dynamic bending radius	20 times the cable diameter

2. OPTICAL FIBRE

Optical Fibres supplied in this specification meet the requirements of ITU-T G.652.D


Parameter	Specification
MFD (1310nm)	$9.1 \pm 0.4 \mu\text{m}$
MFD (1550nm)	$10.4 \pm 0.5 \mu\text{m}$
Cladding diameter	$125 \pm 1.0 \mu\text{m}$
Fiber diameter	$245 \pm 7 \mu\text{m}$, with UV coating, and colored to : $250 \pm 15 \mu\text{m}$
Core/cladding concentricity error	$\leq 0.6 \mu\text{m}$
Coating/cladding concentricity error	$\leq 12.0 \mu\text{m}$
Cladding non circularity	$\leq 1.0\%$
Cut off wavelength	$\lambda_{cc} \leq 1260 \text{nm}$
Attenuation coefficient	1310nm: 0.35dB/km 1383nm: 0.35dB/km 1550nm: 0.21dB/km
Bending-loss performance of optical fiber @1310nm&1550nm	$\leq 0.05 \text{dB}$ (100 turns around a mandrel of 50mm diameter)
Polarization mode dispersion maximum individual fibre	$\leq 0.2 \text{ps}/\sqrt{\text{km}}$
Polarization mode dispersion link value	$\leq 0.1 \text{ps}/\sqrt{\text{km}}$
Zero-dispersion wavelength	$1312 \pm 12 \text{nm}$
Zero-dispersion slope	$\leq 0.091 \text{ps}/\text{nm}^2 \cdot \text{km}$

3. OPTICAL CABLE

3.1. TECHNICAL CHARACTERISTICS


- The technology ensures enough metallic protection to the fibers that are inside the cable.
- Accurate process control ensures good mechanical and temperature performance.
- High quality raw material guarantees the long service life of cable.

3.2. CROSS SECTION CABLE

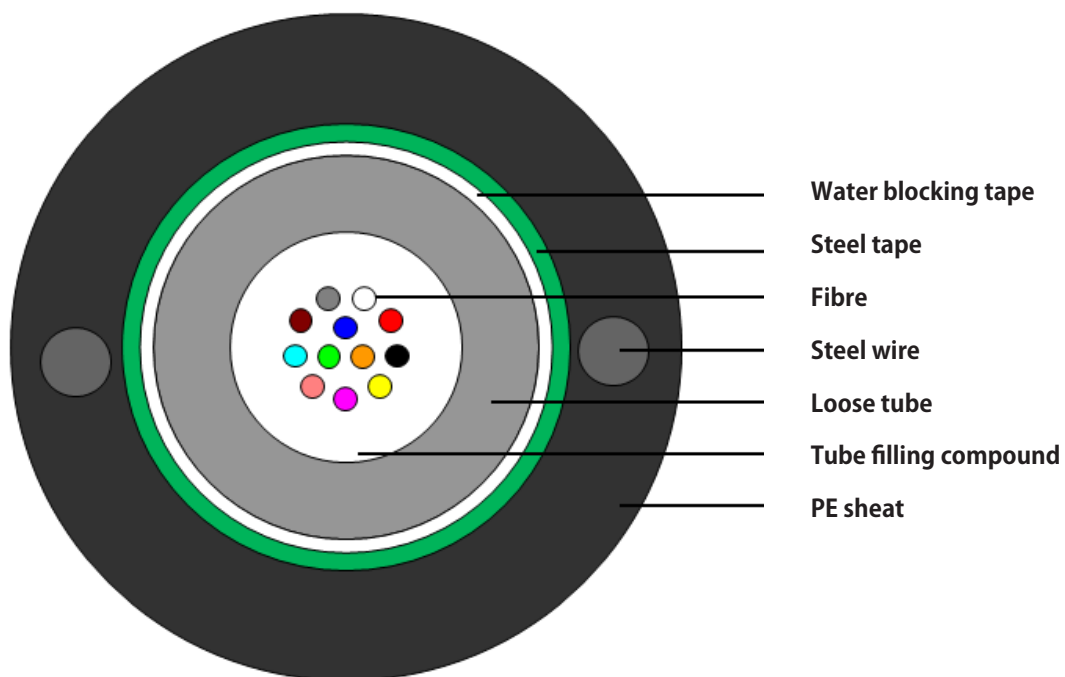

3.3. FIBRE AND LOOSE TUBE IDENTIFICATION

The color code of fibres and loose tube will be identification in accordance with the following color sequence, other sequence also is available. The color of the loose tube will be natural.

Fiber color code	1	2	3	4	5	6
	 Blue	 Orange	 Green	 Brown	 Grey	 White
	7	8	9	10	11	12
	 Red	 Black	 Yellow	 Violet	 Pink	 Aqua
	13	14	15	16	17	18
	 Blue with black ring	 Orange with black ring	 Green with black ring	 Brown with black ring	 Grey with black ring	 White with black ring
	19	20	21	22	23	24
 Red with black ring	Natural	 Yellow with black ring	 Violet with black ring	 Pink with black ring	 Aqua with black ring	

3.4. DIMENSIONS AND DESCRIPTIONS

The standard optical cable structure is shown in the following table, other structure and fibre count are also available according to customer requirements.

Parameter	Contents	Value		
		6	12	24
Loose tube	Fiber counts/tube	6	12	24
	Outer diameter (mm)	4.0		
Water blocking	Material	Water Blocking Tape		
Armor	Material	Steel tape		
Strength member	Material	Steel wire		
	Diameter (mm)	Nominal: 1.0		
Sheat	Material	HDPE		
	Color	Black		
	Thickness (mm)	Nominal: 2.2		
Cable diameter(mm) Approx.		10.4		
Cable weight(kg/km) Approx.		105		

3.5. MAIN MECHANICAL PERFORMANCE

Item	Tension(N)	Crush(N/100mm)	
		Short term	Long term
AR-1UDPPE-xxF-G652D	1800	1500	750

5. MECHANICAL, PHYSICAL AND ENVIRONMENTAL TEST CHARACTERISTICS

The mechanical and environmental performance of the cable are in accordance with the following table. Unless otherwise specified, all attenuation measurements required in this section shall be performed at 1550nm.

Items	Test method	Requirements
Tension	IEC 60794-1-2-E1 Load: According to 3.5 Sample length: Not less than 50m. Duration time: 1 min.	Additional attenuation: ≤ 0.1 dB after test No damage to outer jacket and inner elements
Crush	IEC 60794-1-2-E3 Load: According to 3.5 Duration of load: 1 min	Additional attenuation: ≤ 0.1 dB after test No damage to outer jacket and inner elements
Impact	IEC 60794-1-2-E4 Radius: 300 mm Impact energy: 10 J Impact number: 1 Impact points: 3	Additional attenuation: ≤ 0.1 dB No damage to outer jacket and inner elements
Repeated Bending	IEC 60794-1-2-E6 Bending radius: $20 \cdot D$ Cycles: 25 Load: 150 N	Additional attenuation: ≤ 0.1 dB No damage to outer jacket and inner elements
Torsion	IEC 60794-1-2-E7 Cycles: 10 Length under test: 1 m Turns: $\pm 180^\circ$ Load: 150 N	Additional attenuation: ≤ 0.1 dB No damage to outer jacket and inner elements
Water Penetration	IEC 60794-1-2-F5B Time : 24 hours Sample length : 3m Water height : 1m	No water leakage
Temperature cycling	IEC 60794-1-2-F1 Sample length: at least 1000m Temperature range: $-40^\circ\text{C} \sim +70^\circ\text{C}$ Cycles: 2 Temperature cycling test dwell time: 12 hours	The change in attenuation coefficient shall be less than 0.05 dB/km.
Other parameters		According to IEC 60794-1

5. PACKAGING AND DRUM

5.1 CABLE SHEATH MARKING

Unless otherwise specified, the cable sheath marking shall be as follows:

- Color: white
- Contents: ARTIC, the year of manufacture, the type of cable, cable number, length marking
- Interval: 1 m

Outer sheath marking legend can be changed according to user's requests.

5.2 REEL LENGHT

Standard reel length: 2/4 km/reel, other length is also available.

5.3 CABLE DRUM

The cables are packed in fumigated wooden drums.

5.4 CABLE PACKING

Both ends of the cable will be sealed with suitable plastic caps to prevent the entry of moisture during shipping, handling and storage. The inner end is available for testing.