



AERIAL CABLE  
AR-1FADPE-ADSS  
150M xxF-G652D

## 1. GENERAL

### 1.1. SCOPE

This Specification covers the design requirements and performance standard for the supply of optical fibre cable in the industry. ARTIC ensures a stable quality control system for our cable products through several programs including ISO 9001, ISO 14001 and ROHS.

Cable type	Application
AR-1FADPE-ADSS-150M xxF-G652D	Self-supporting aerial installation

150 represents the span.

xx represents the fibre count.

### 1.2. REFERENCE

The cable offered by ARTIC are designed, manufactured and tested according to the standards as follows:

ITU-T G.652.D	Characteristics of a single-mode optical fibre
IEC 60794-1-1	Optical fibre cables-part 1-1: Generic specification-General
IEC 60794-1-2	Optical fibre cables-part 1-2: Generic specification-Basic optical cable test procedure
IEC 60794-3	Optical fibre cables-part 3: Sectional specification-Outdoor cables
IEC 60794-4-20	Aerial optical cables along electrical power lines – Family specification for ADSS (All Dielectric Self Supported) optical cables

### 1.3. LIFE TIME

Optical fibre cables supplied in compliance with this specifications is capable to withstand the typical service condition for a period of twenty-five (25) years without detriment to the operation characteristics of the cable.

## 1.4. APPLICATION

Item	Value
Max. pole distance	150m
Operation temperature	-40 °C~+70 °C
Storage temperature	-40 °C~+70 °C
Static bending radius	10 times the cable diameter
Dynamic bending radius	20 times the cable diameter

## 2. OPTICAL FIBRE

Optical Fibres supplied in this specification meet the requirements of ITU-T G.652.D


Parameter	Specification
MFD (1310nm)	8.7~9.5 $\mu$ m
Cladding diameter	125 $\pm$ 1.0 $\mu$ m
Fiber diameter	235~255 $\mu$ m, with UV coating, and colored to : 250 $\pm$ 15 $\mu$ m
Core/cladding concentricity error	$\leq$ 0.6 $\mu$ m
Coating/cladding concentricity error	$\leq$ 12.0 $\mu$ m
Cladding non circularity	$\leq$ 1%
Cut off wavelength	$\lambda_{cc} \leq 1260$ nm
Attenuation coefficient	1310nm: 0.36dB/km 1550nm: 0.23dB/km
Bending-loss performance of optical fiber @1310nm&1550nm	$\leq$ 0.05dB (100 turns around a mandrel of 60mm diameter)
Polarization mode dispersion maximum individual fibre	$\leq$ 0.1ps/ $\sqrt$ km
Polarization mode dispersion link value	$\leq$ 0.2ps/ $\sqrt$ km
Zero-dispersion wavelength	1300~1324nm
Zero-dispersion slope	$\leq$ 0.092ps/nm <sup>2</sup> ·km

### 3. OPTICAL CABLE

#### 3.1. TECHNICAL CHARACTERISTICS

- The unique second coating and stranding technology provide the fibres with enough space and bending endurance, which ensure good optical property of the fibres in the cable.
- Accurate process control ensures good mechanical and temperature performance.
- High quality raw material guarantees the long service life of cable.

#### 3.2. CROSS SECTION CABLE

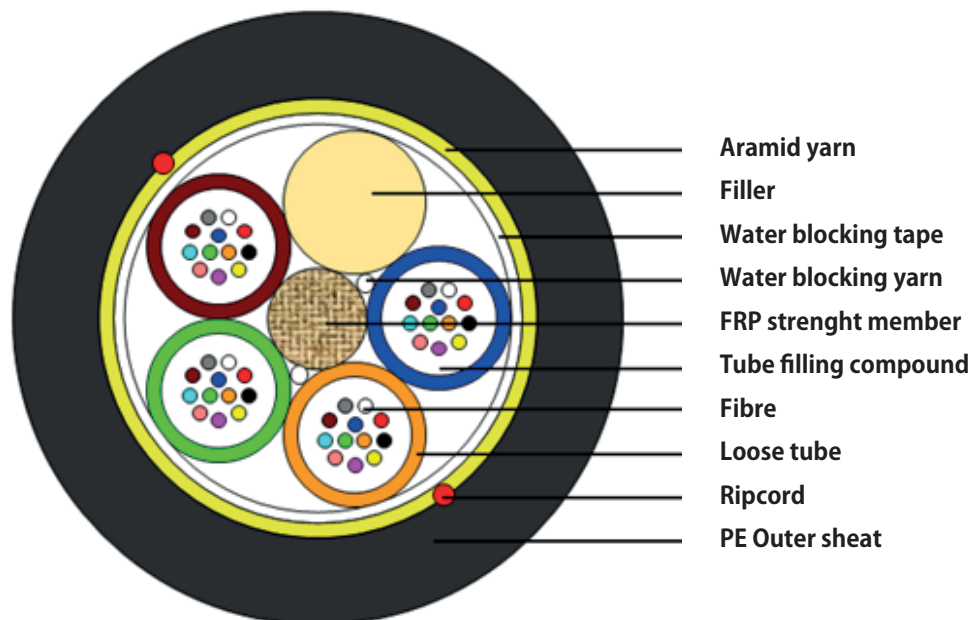

#### 3.3. FIBRE AND LOOSE TUBE IDENTIFICATION

The color code of fibre and loose tube will be identification in accordance with the following color sequence, other sequence is also available.

	1	2	3	4	5	6
Color code	● Blue	● Orange	● Green	● Brown	● Grey	○ White
	7	8	9	10	11	12
	● Red	● Black	● Yellow	● Violet	● Pink	● Aqua

### 3.4. DIMENSIONS AND DESCRIPTIONS

The standard optical cable structure is shown in the following table, other structure and fibre count are also available according to customer requirements.

Parameter	Contents	Value	
		24	48
Structure	Type	1+5	1+5
Loose tube	Fiber counts/tube	6	12
	Outer diameter (mm)	2.2	2.5
Central strength member	Material	FRP	
	Diameter (mm)	1.8	2.0
	PE layer diameter (mm)	-	--
Water blocking	Material	Water blocking yarn & tape	
Peripheral strength member	Material	Aramid yarn	
Outer sheat	Material	MDPE	
	Color	Black	
	Thickness (mm)	Minimum: 1.5	
Ripcord	Number	2	
	Color	Red	
Cable diameter(mm) Approx.		10.4	11.0
Cable weight(kg/km) Approx.		85	95

### 3.5. MAIN MECHANICAL AND ENVIRONMENTAL PERFORMANCE

#### Main mechanical performance

Item	Max allowable tension(N)		Crush(N/100mm)
	MTI	MTN	
24	800	1600	2200
48	1000	2000	

#### Environmental and installation condition

Max. wind speed	Max. ice thickness	Initial Installation sag	Temperature
35 m/s	0	1.5%	-40 °C~+70 °C

## 4. MECHANICAL, PHYSICAL AND ENVIRONMENTAL TEST CHARACTERISTICS

The mechanical and environmental performance of the cable are in accordance with the following table. Unless otherwise specified, all attenuation measurements required in this section shall be performed at 1550nm.

Items	Test method	Requirements
<b>Tension</b>	<b>IEC 60794-1-2-E1</b> Load: According to 3.5 Sample length: Not less than 50m. Duration time: 1 min.	Fibre strain: $\leq 0.05\%$ @MTI, $\leq 0.2\%$ @MTN Cable strain: $\leq 0.5\%$ Cable residual strain: $\leq 0.05\%$ Additional attenuation for MTI: $\leq 0.05\text{dB}$ after test Additional attenuation for MTN: $\leq 0.1\text{dB}$ after test No damage to outer jacket and inner elements
<b>Crush</b>	<b>IEC 60794-1-2-E3</b> Load: According to 3.5 Duration of load: 1 min	Additional attenuation: $\leq 0.10\text{dB}$ after test Average Additional attenuation: $\leq 0.05\text{dB}$ after test No damage to outer jacket and inner elements
<b>Impact</b>	<b>IEC 60794-1-2-E4</b> Radius: 300 mm Impact energy: 2.94N.m Impact number: 4 Impact points: 5	Additional attenuation: $\leq 0.1\text{dB}$ Average Additional attenuation: $\leq 0.05\text{dB}$ No damage to outer jacket and inner elements
<b>Repeated Bending</b>	<b>IEC 60794-1-2-E6</b> Bending radius: $20^{\circ}\text{D}$ Cycles: 25 Load: 49.03N	Additional attenuation: $\leq 0.1\text{dB}$ Average Additional attenuation: $\leq 0.05\text{dB}$ No damage to outer jacket and inner elements
<b>Torsion</b>	<b>IEC 60794-1-2-E7</b> Cycles: 10 Length under test: 1m Turns: $\pm 180^{\circ}$ Load: 49.03N	Additional attenuation: $\leq 0.1\text{dB}$ No damage to outer jacket and inner elements
<b>Water Penetration</b>	<b>IEC 60794-1-2-F5B</b> Time: 24 hours Sample length: 3m Water height: 1m	No water leakage

<b>Temperature cycling</b>	<b>IEC 60794-1-2-F1</b> Sample length: at least 1000m Temperature range: -40 °C~+70 °C Cycles:2 Temperature cycling test dwell time: 12 hours	The change in attenuation coefficient shall be less than 0.05 dB/km.
<b>Other parameters</b>		According to <b>IEC 60794-1</b>

## 5. PACKAGING AND DRUM

### 5.1 CABLE SHEATH MARKING

Unless otherwise specified, the cable sheath marking shall be as follows:

- Color: white
- Contents: ARTIC, the year of manufacture, the type of cable, cable number, length marking
- Interval: 1 m

Outer sheath marking legend can be changed according to user's requests.

### 5.2 REEL LENGHT

Standard reel length: 4 km/reel, other length is also available.

### 5.3 CABLE DRUM

The cables are packed in fumigated wooden drums.

### 5.4 CABLE PACKING

Both ends of the cable will be sealed with suitable plastic caps to prevent the entry of moisture during shipping, handling and storage. The inner end is available for testing.