



ONECLICK



INLINE SLIM
TERMINAL BOX
1 PORT WITH SC-APC
(Shooter)

AR-TB-INLINE-1P-SLIM

Product Description

Ability to carry out the termination of compact optical cables through connectorization in the field.

Anchoring cables with versatile retention system that allows compatibility with drop cables

Application

1. FTTx networks (FTTH, FTTD)
2. Enterprise/Access networks



Product Parameter

Type	Fiber optic adapter
Material	ABS
Optical fiber diameter	125u m (657A& 657B)
Tight buffer diameter (u m)	250um
Fiber mode	Single mode
Operation time	About 30s(no fiber cut)
Average Insert loss	s 0.15dB(1310nm & 1550nm)
Application	FTTx networks (FTTH, FTTD)
Operating temperature	-25~+75°C
Outline dimension	94X25X19mm
RoHS, ce	RoHS, ce
IP rate	IP30

Feature

1. Compact dimensional; Easy handling;
2. Fixing to the wall by screw or double-sided tape;
3. Can be installed on any flat vertical surface; Symmetrical cover that allows fitting on both sides;
4. Compatibility with:
5. Fit to cable 2x1.6mm, 3x2mm and circular 3mm drop cables; 0.9mm diameter fiber for Invisilight applications.

Maximum input : Maximum diameter of the input cable (mm) is 3.0mm

Maximum output : Output cable diameter (mm) is 3.0mm

Adapter : SC/APC Adapter

* Simplex without shutter


* Simplex with shutter

Material : PC+ABS

IP Rate : IP30

IK Rate : IK09

Detailed Image

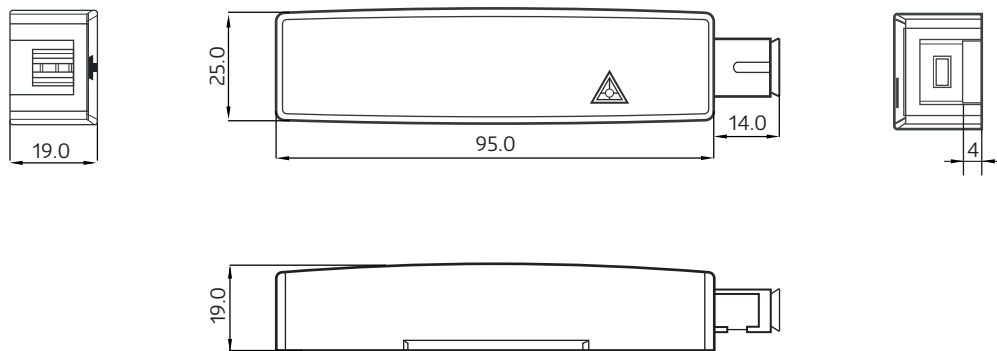

Cable Performance

Cabo Micro Indoor Low Friction - 2mm x 1,6mm;

Cabo Drop Low Friction - 3mm x 2mm;

Cabo Drop Fast Compacto - 3mm x 2mm; Cabo Drop

Circular 3mm

