



# Installation Manual

Reinforced  
Field Connector  
Fast  
Compatible

AR-RFC-SCAPC-FC




# 1 Installation Manual


## 1.1 Indications

To use this product correctly, the instructions must be read carefully before use. Please assemble the connector according to these instructions, using the matched tools.


## 1.2 Operation Steps




1 Insert the boot



2 Insert the silicone rubber ring




3 Put on the lockdown cap




4 Put on the cable clip

5 After installing the SC/APC field mount connector and removing the case


CABLE STRIPPER

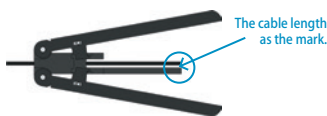


1 Strip the cable jacket.

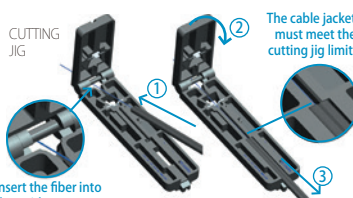

2 Strip the fiber coating.

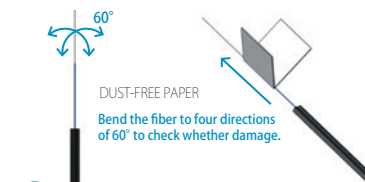


3 Check the fiber and clean the fiber.

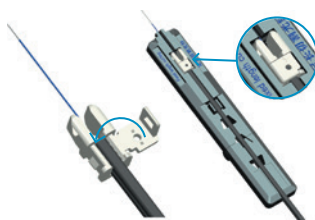


4 Fix the cable.




5 Cut the fiber.

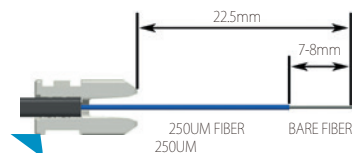

6 Cutting length. (Picture shown only for reference)

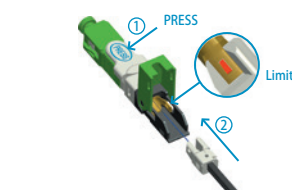

7 Press the opener, then insert the fiber into the tail of connector till the limit.

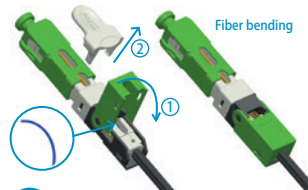

8 Press the cover, remove the opener, complete the assembly

# 1 Installation Manual

## 1.2 Operation Steps



5 Sequence after installation is as shown above



7 Align the arrow of the quick connector with the indicator window of the main body (yellow at the triangular notch Circled) Insert the quick connector to the limit



8 Push up the cable clip.




9 Screw tight the lockdown cap.



10 Insert the silicone ring into the end of the lockdown cap



11 Tighten the boot, and the assembly is complete



Disassemble from 1 to 6 in the sequence shown in the figure below, and refer to the connector disassembly sequence for quick connectors